


HULK[®] SERIES DOUBLE SCISSOR TABLE

L I F T P R O D U C T S S P E C I F I C A T I O N S



Design Highlights

- Pre-wired Power Unit with UL Approved Control Panel
- Self Lubricating Bushings
- Solid Steel Legs with Hard Chromed Pins
- Velocity Fuses on All Cylinders to Prevent Uncontrolled Descent
- Wire Braided Hydraulic Hoses
- Polyethylene Reservoir Allows Easy Visual Check of Oil Level or Steel Reservoir with Dip Stick
- Maintenance Strut
- Meets or Exceeds The ANSI MH29.1 Standard for Industrial Scissors Lifts
- 1 HP Power Unit Single Phase with 115 VAC Control Valve

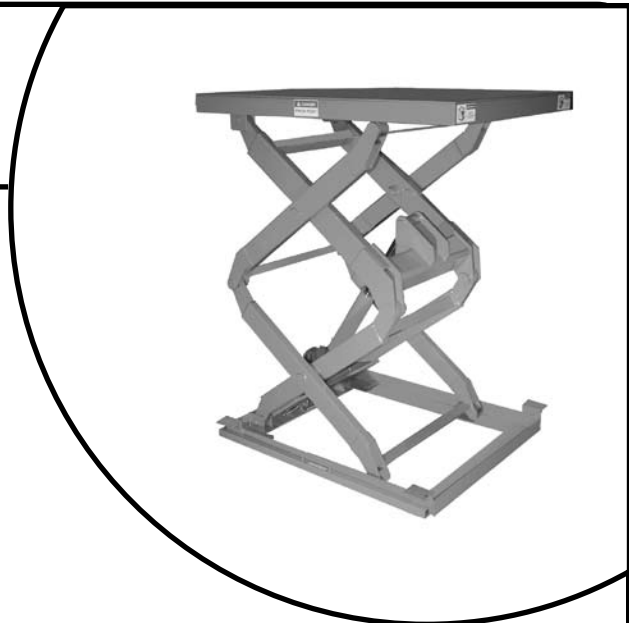

Available Options

- Tapered Toe Guards
- Foot Switch with Cover - NEMA 1
- In Motor Warning Beeper and Flashing Light on a Post X 60" High or Wall Mounted Bracket
- Increased Horsepower Available
- Manual Lowering Valve Located at Power Pack
- 1 HP Air/hydraulic Power Unit with Air Lever Valve or Air Foot Valve and 10' of Hose
- Portability with Casters
- Stainless Steel
- Accordion Bellow - Yellow/black 4 Sides of Base
- Hot Dip Galvanizing
- Special Color
- Other _____

Project Information

Job Name _____

Address _____

General Contractor _____

Distributor _____

Model _____ Quantity _____ Voltage/Phase _____

HULK[®] SERIES DOUBLE SCISSOR TABLE

L I F T P R O D U C T S S P E C I F I C A T I O N S

Model No.	Travel [in]	Capacity [lb]	Standard Platform & Base Frame [in]	Max Platform Size [in]	Lowered Height [in]	Raised Height [in]	Raise Lower Time [sec]	Ship Weight [lb]
KDS48-2	48	2,000	30 x 36	40 x 48	12	60	20	800
KDS60-2	60	2,000	30 x 48	48 x 60	14	74	40	1,220
KDS60-4		4,000	30 x 48	48 x 60	14	74	80	1,350
KDS60-6		6,000	30 x 48	48 x 60	14	74	120	1,650
KDS80-2	80	2,000	30 x 60	48 x 72	14	94	50	1,420
KDS80-4		4,000	30 x 60	48 x 72	14	94	100	1,600
KDS80-6		6,000	42 x 60	48 x 72	18	98	150	1,890
KDS96-2	96	2,000	30 x 72	48 x 96	14	110	70	1,500
KDS96-4		4,000	30 x 72	48 x 96	14	110	140	1,700
KDS96-6		6,000	42 x 72	48 x 96	18	114	210	2,240
KDS118-2	118	2,000	30 x 88	48 x 102	14	132	90	1,680

